


# Product Bulletin

## Hartco SANDMASK 425

Used as a sandblast resist material when sandblasting wood (raw or painted), glass, polyurethane foam, fiberglass, and other similar substrates. 425-S (non-perforated liner) is for use with friction fed computer graphics machines. 425-SP (perforated liner) is for use with pinfed computer graphics machines.

<b>Available Widths</b>	15", 20", 24", 30", 47"
<b>Roll Length</b>	10 yards
<b>PVC Thickness</b>	22.5 Mils of Vinyl
<b>Adhesive Thickness</b>	2.5 Mils Waterbased Acrylic
<b>Liner</b>	Paper and Plastic
<b>Air Pressure Limits</b>	Up to 90 PSI (Up to 80 using large grit sizes)
<b>Compatible Grits</b>	Sand Aluminum Oxide Garnet Silica Carbide Glass Beads Others
<b>Recommended Blade</b>	60°
<b>Shelf Life</b>	Up to 1 year
<b>Storage</b>	50° to 80°F Do not allow material to be exposed to direct sunlight for extended periods of time

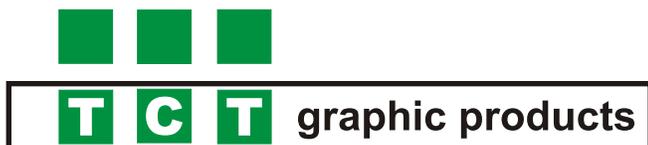

Web Site: [www.tctgp.com](http://www.tctgp.com)

22 Voyager Court South, Etobicoke, ON M9W 5M7  
Ph. (416) 675-6690 1-877-675-6690 Fax (416) 675-6696

3103-20800 Westminster Hwy, Richmond, BC V6V 2W3  
Ph. (604) 244-0045 1-877-277-0045 Fax (604) 244-0270

4430-10th Street N.E., Calgary, AB T2E 6K3  
Ph. (403) 735-4913 1-888-561-5038 Fax (403) 735-4911

196 Joseph Zatzman Dr., Suite 7, Dartmouth, NS B3B 1N4  
Ph. (902) 468-5227 1-888-772-8880 Fax (902) 468-5185

We believe the information on this product to be accurate. However, since we cannot anticipate or control the conditions under which this information or our products may be used, we cannot guarantee results obtained through their use. Tests of our products should be made by users to determine the suitability of these products for a specific purpose. The products are sold without warranty, either express or implied. The purchaser should refer to TCT Graphic Products' price List for Terms and Conditions or Sale, Including Disclaimer of Warranties and Limitation of Liability.